


## QUARTZ FINISH ON ORTAL MODELS

1. The application must have a minimum 2" offset, Quartz cannot be applied in a flushed installation.
2. Quartz cannot be applied on the horizontal plane above the fireplace glass, hearth or on the sides of the fireplace glass opening. Combustibles are not allowed in this area.
3. Quartz must be installed on a non-combustible surface to prevent direct exposure to fireplace cavity. Recommend using 5/8" Type X fire rated drywall.
4. Entire weight of the wall including finish material must be supported from the framing.
5. Avoid installing the Quartz with seams where there may be movement/expansion that would rupture the connection point.
6. Be sure to refer to ORTAL manual for installation instructions.

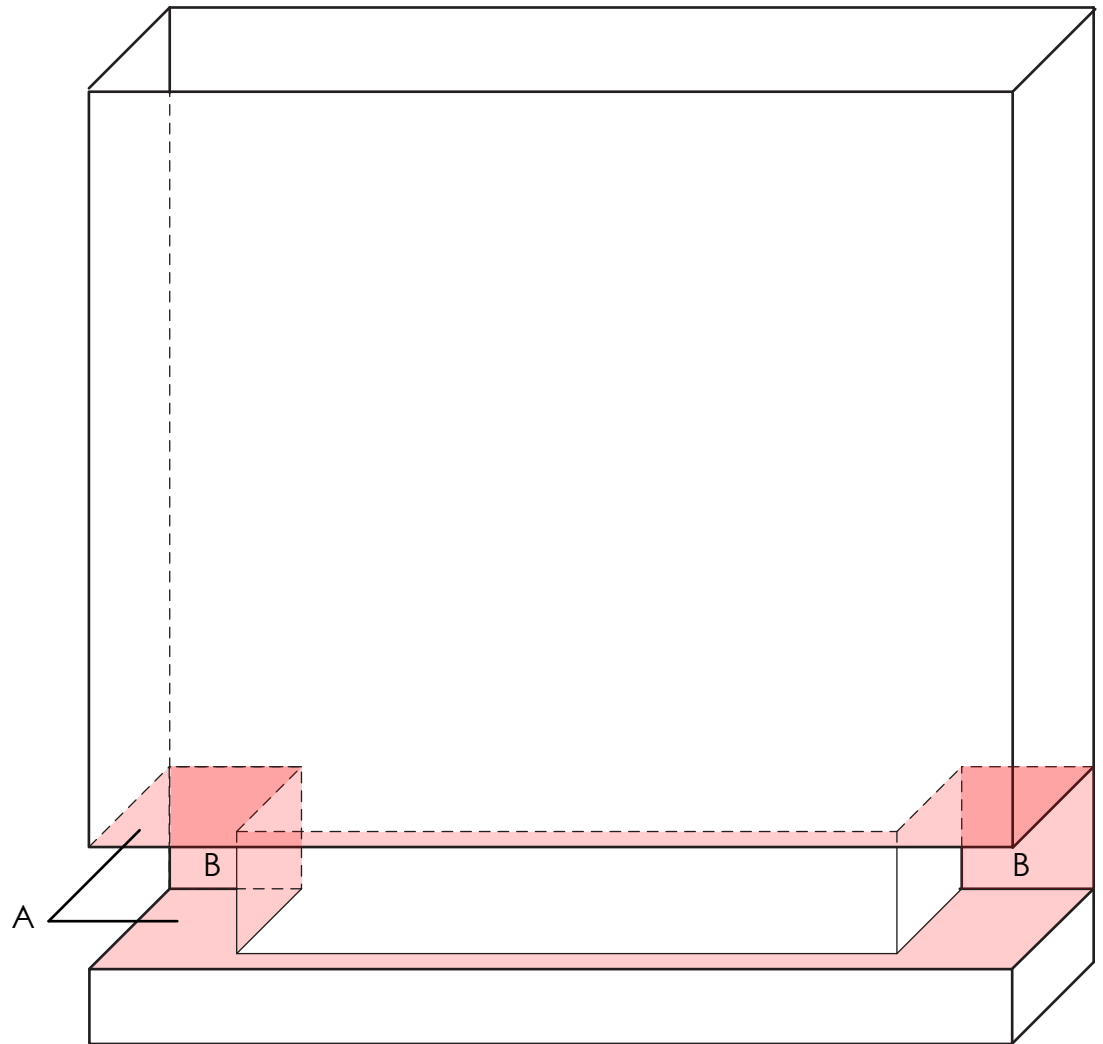

### Notes:

A. Horizontal Surface (shaded portion) - use only non combustible materials like metal, drywall, marble. Do not use Quartz or other combustibles.

B. Vertical opening. Combustibles are not allowed in this area.